

PREXOS

SERIES 6

Monocrystalline Solar PV Modules, Bifacial, MBB, M6 Half-Cell, PREXOS VSMDHT.72.AAA.05

POWER OUTPUT WATT

435-460

MAXIMUM EFFICIENCY %

20.68

POSITIVE POWER TOLERANCE WP

0~+4.99

CELLS (HALF CUT)

M6 144



CYLINDRICAL TABBING WIRE is used to reduce the shadow on cell active area



Implementation of bypass diodes in split JB series-parallel connections enable the module to perform in **PARTIAL SHADOW CONDITIONS** with respect to full-cell module



HIGHER NUMBER OF BUSBAR makes the PV modules less prone to loss in efficiency and increase tolerance to micro cracks



FIELD RELIABILITY is improved due to multiple contact points on the cell which lowers the cell stress during module fabrication



LCOE IS CUT BACK by using M6 size solar cell with adding more power output than lower size cell module



UP TO 15% POWER GAIN from ground facing side depending upon the albedo of the ground surface




LOWER INTERNAL RESISTANCE boosts module power helping to achieve minimal power loss with respect to previous variant modules



Enlisted as a **TOP PERFORMER IN PVEL'S 2021** module reliability scorecard in terms of Potential Induced Degradation reliability test

SHADE TOLERANCE

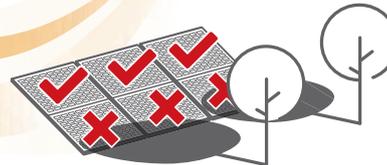

HALF-CELL MODULE

Functions like two parallel modules, enabling the half-cell string to work in partial shading which is absent in full cell module



FRAME

SILVER

BLACK

BACKSHEET

TRANSPARENT

WHITE

BLACK

APPLICATIONS

- On-grid large scale utility systems
- On-grid rooftop industrial and commercial systems
- Rooftop residential systems

THIS DATASHEET IS APPLICABLE FOR: PREXOS VSMDHT.72.AAA.05 (AAA=435-460)

Electrical Data^{1,2} All data refers to STC (AM 1.5, 1000 W/m², 25°C)

Peak Power P _{max} (Wp)	435	440	445	450	455	460
Maximum Voltage V _{mpp} (V)	41.4	41.5	41.5	41.6	41.6	41.7
Maximum Current I _{mpp} (A)	10.51	10.62	10.72	10.82	10.93	11.03
Open Circuit Voltage V _{oc} (V)	48.7	48.8	48.9	49	49.1	49.2
Short Circuit Current I _{sc} (A)	11.45	11.56	11.67	11.77	11.88	11.99
Module Efficiency η(%)	19.56	19.79	20.01	20.23	20.46	20.68

1) STC: 1000 W/m² irradiance, 25°C cell temperature, AM1.5g spectrum according to EN 60904-3. | 2) Power measurement uncertainty is within +/- 2%.

Electrical Parameters at NOCT³

Power (W)	325	328	332	336	339	343
V@P _{max} (V)	38.1	38.2	38.2	38.3	38.3	38.4
I@P _{max} (A)	8.51	8.60	8.68	8.76	8.85	8.93
V _{oc} (V)	45.8	45.9	46.1	46.1	46.2	46.2
I _{sc} (A)	9.16	9.25	9.33	9.42	9.50	9.59

3) NOCT irradiance 800 W/m², ambient temperature 20°C, wind speed 1 m/sec

Equivalent Bifacial Output

Bifacial Gain						
5%	457	462	467	473	478	483
10%	479	484	490	495	501	506
15%	500	506	512	518	523	529

Temperature Coefficients (Tc) permissible operating conditions

Tc of Open Circuit Voltage (β)	-0.27%/°C
Tc of Short Circuit Current (α)	0.050%/°C
Tc of Power (γ)	-0.35%/°C
Maximum System Voltage	1500V
NOCT	45°C ± 2°C
Temperature Range	-40°C to + 85°C


Mechanical Data

Length × Width × Height	2118 × 1050 × 35mm (83.38 × 41.33 × 1.38 inches)
Weight	23.5 Kg (51.81 lbs)
Junction Box	IP68, Split Junction Box with individual bypass diodes
Cable & Connectors [#]	200 mm (+ve terminal) and 300 mm (-ve terminal) length cables, MC4 Compatible/MC4 Connectors
Application Class	Class A (Safety class II)
Superstrate	3.2 mm (0.125 inches) high transmission low iron tempered glass, AR coated
Cells	72 Mono PERC (144 half-cells)
Back Sheet	High Transmittance Composite film with Clear Tedlar® from Dupont®
Frame	Anodized aluminium frame with twin wall profile
Mechanical Load Test	5400 Pa (Snow load), 2400 Pa (Wind load)
Maximum Series Fuse Rating	20 A


Warranty and Certifications

Product Warranty**	12 years
Performance Warranty**	Linear Power Warranty for 27 years with 2% for 1st year degradation and 0.55% from year 2 to year 27
Approvals and Certificates	IEC 61215 : 2016, IEC 61730 : 2016, IEC 61701, IEC 62716, IEC 60068-2-68 [^] , IEC 62804, CEC (California), UL 61215, UL 61730, CAN-CSA, CE

Dimensions in mm

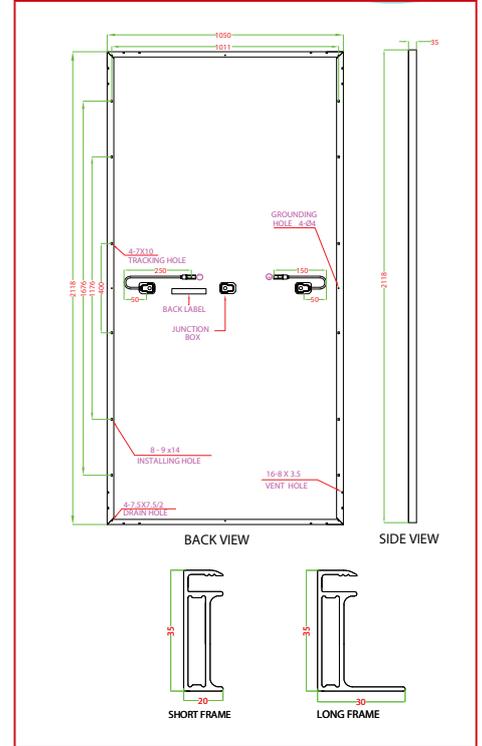


Typical I-V Curves⁴

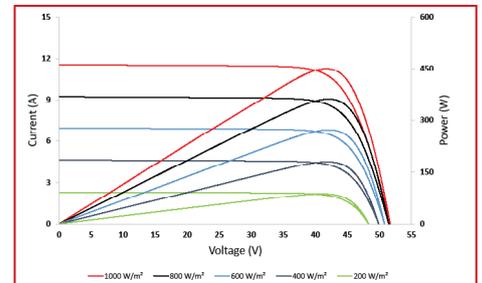

4) Average relative efficiency reduction of 5% at 200 W/m² according to EN 60904-1.

Performance Warranty

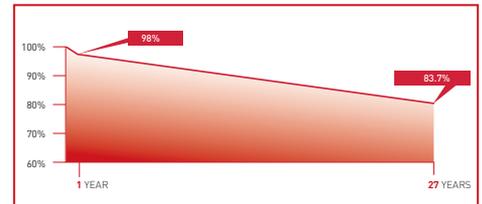

Packaging Information

Quantity /Pallet	31
Pallets/Container (40'HC)	22
Quantity/Container (40'HC)	682

[^] All (*) certifications under progress.
** Refer to Vikram Solar's warranty document for terms and conditions.
* 400mm (15.75 inches), 1000mm (39.37 inches), 1200mm (47.24 inches) cable lengths are also available

Specifications included in this datasheet are subject to change without notice. Electrical data without guarantee. Please confirm your exact requirement with the company representative while placing your order.
*Vikram Solar & Prexos and the accompanying Logos are trademarks of Vikram Solar Limited registered in India.