

somera

HIGH EFFICIENCY MONOFACIAL PV MODULES

345-375W

MAXIMUM EFFICIENCY %

20.22

POSITIVE POWER TOLERANCE WP

0~+4.99

CELLS

M6 120

MODULE TECHNOLOGY

**HALF CUT
DESIGN**

WITH IMPROVED SHADE TOLERANCE



CYLINDRICAL TABBING WIRE is used to reduce the shadow on cell active area



Implementation of bypass diodes in split JB series-parallel connections enable the module to perform in **PARTIAL SHADOW CONDITIONS** with respect to full-cell module



HIGHER NUMBER OF BUSBAR makes the PV modules less prone to loss in efficiency and increase tolerance to micro cracks



FIELD RELIABILITY is improved due to multiple contact points on the cell which lowers the cell stress during module fabrication



LCOE IS CUT BACK by using M6 size solar cell with adding more power output than lower size cell module



LOWER INTERNAL RESISTANCE boosts module power helping to achieve minimal power loss with respect to previous variant modules



FRAME SUPERSTRATE SUBSTRATE

BLACK

GLASS

**BACKSHEET
WHITE**

APPLICATIONS

- ♦ On-grid large scale utility systems
- ♦ On-grid rooftop industrial and commercial systems
- ♦ Rooftop residential systems



vikramsolar
CREATING CLIMATE FOR CHANGE

THIS DATASHEET IS APPLICABLE FOR: SOMERA VSMH.60.AAA.05 (AAA=345-375)

Electrical Data^{1,2} All data refers to STC (AM 1.5, 1000 W/m², 25°C)

	345	350	355	360	365	370	375
Peak Power P _{max} (Wp) (0 ~ +4.99Wp)	345	350	355	360	365	370	375
Maximum Voltage V _{mpp} (V)	34.6	34.6	34.7	34.7	34.8	34.9	34.9
Maximum Current I _{mpp} (A)	10.01	10.13	10.27	10.41	10.53	10.65	10.75
Open Circuit Voltage V _{oc} (V)	40.7	40.8	40.8	40.9	41	41.1	41.1
Short Circuit Current I _{sc} (A)	11.01	11.13	11.25	11.35	11.45	11.55	11.65
Module Efficiency η(%)	18.61	18.88	19.14	19.41	19.68	19.95	20.22

1) STC:1000 W/m² irradiance, 25°C cell temperature, AM1.5g spectrum according to EN 60904-3. 1.2) Power measurement uncertainty is within +/- 2%.

Electrical Parameters at NOCT³

Power (W)	255.3	259.0	262.7	266.4	270.1	273.8	277.5
V@P _{max} (V)	32.0	32.0	32.1	32.1	32.2	32.2	32.2
I@P _{max} (A)	8.01	8.10	8.22	8.33	8.42	8.52	8.60
V _{oc} (V)	38.0	38.1	38.1	38.2	38.3	38.4	38.4
I _{sc} (A)	10.03	10.14	10.25	10.34	10.43	10.52	10.61

3) NOCT irradiance 800 W/m², ambient temperature 20°C, wind speed 1 m/sec

Temperature Coefficients (Tc) permissible operating conditions

Tc of Open Circuit Voltage (β)	-0.27%/°C
Tc of Short Circuit Current (α)	0.050%/°C
Tc of Power (γ)	-0.35%/°C
Maximum System Voltage	1500V
NOCT	45°C ± 2°C
Temperature Range	-40°C to + 85°C

Mechanical Data


Length × Width × Height	1766 × 1050 × 35mm (69.52 × 41.33 × 1.38 inches)
Weight	20.3 Kg (44.75 lbs)
Junction Box	IP68, Split Junction Box with individual bypass diodes
Cable & Connectors [#]	200 mm (+ve terminal) and 300 mm (-ve terminal) length cables, MC4 Compatible/MC4 Connectors
Application Class	Class A (Safety class II)
Superstrate ^{##}	3.2 mm (0.125 inches) high transmission low iron tempered glass, AR coated
Cells	60 Mono PERC (120 half-cells) solar cells
Back Sheet	Composite film
Frame	Anodized aluminium frame with twin wall profile
Mechanical Load Test	5400 Pa (Snow load), 2400 Pa (Wind load)
Maximum Series Fuse Rating	20 A

Warranty and Certifications


Product Warranty ^{**}	12 years
Performance Warranty ^{**}	Linear Power Warranty for 27 years with 2% for 1st year degradation and 0.55% from year 2 to year 27
Approvals and Certificates	IEC 61215 : 2016, IEC 61730 : 2016, IEC 61701, IEC 62716, IEC 60068-2-68 [^] , IEC 62804, CEC (California), UL 61215, UL 61730, CAN-CSA, CE

[^] All (*) certifications under progress. ^{**} Refer to Vikram Solar's warranty document for terms and conditions. [†] 400mm (15.75 inches), 1000mm (39.37 inches), 1200mm (47.24 inches) cable lengths are also available ^{††} Anti-glare Glass is also available

Dimensions in mm

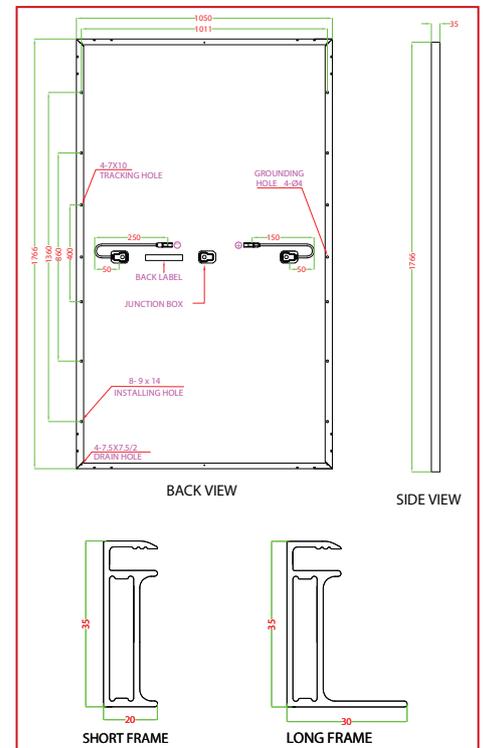


Typical I-V Curves⁴

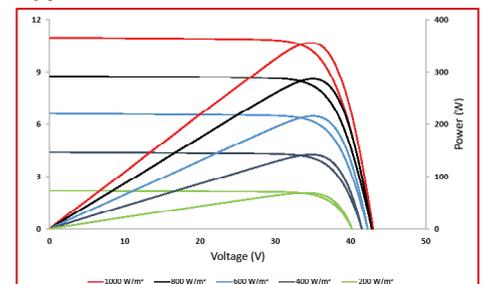

4) Average relative efficiency reduction of 5% at 200 W/m² according to EN 60904-1.

Performance Warranty

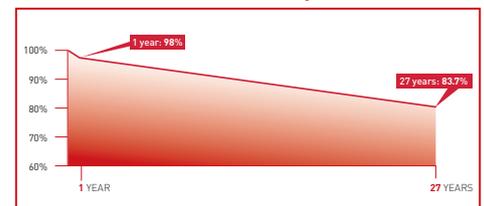

Packaging Information

Quantity /Pallet	31
Pallets/Container (40'HC)	26
Quantity/Container (40'HC)	806

CAUTION: READ SAFETY AND INSTALLATION MANUAL BEFORE USING THE PRODUCT.

Specifications included in this datasheet are subject to change without notice. Electrical data without guarantee. Please confirm your exact requirement with the company representative while placing your order.

Vikram Solar and all its accompanying logos are trademarks of Vikram Solar Limited registered in India.